

# PRODUCT CATALOGUE

# VERA



*Product of*

# JUNAID

GROUP OF COMPANIES



# VERA



**01** Pages 3 - 6

**SEWAGE PUMP**

Pages 7 - 9 **02**

**SEWAGE CUTTER PUMP**

**03** Pages 10 - 23

**CLEAN WATER PUMP**

Pages 24 - 29 **04**

**SUBMERSIBLE PUMPSET**

**05** Pages 30 - 32

**SUBMERSIBLE MOTORS**

Pages 33 - 34 **06**

**CENTRIFUGAL PUMP**

**07** Pages 35 - 36

**PERIPHERAL PUMP**

Pages 37 - 38 **08**

**PRESSURE CONTROLLER**

**09** Page 39

**FLOAT SWITCH**

Page 40 **10**

**ACCESSORIES**

## SEWAGE PUMP - BLUE

**VERA**

## SEWAGE PUMP - BLUE

### Description

This submersible pump with is configured to use with dirty water which is not chemically aggressive towards the materials from which the pumps are made.

### Key Features

- ⦿ Fast and Effective
- ⦿ Reliability and Easy to Use
- ⦿ Long-Lasting
- ⦿ Protection from Overload

### Applications

- ⦿ Clearing Dirty Water
- ⦿ Discharging Domestic Waste Water
- ⦿ Emptying Collection Traps containing partical upto a maximum of  $\varnothing 35\text{mm}$

### Operating Conditions

- ⦿ 5 m Maximum Immersion Depth
- ⦿ Liquid Temperature upto  $35^{\circ}\text{C}$
- ⦿ Maximum Ambient Temperature  $40^{\circ}\text{C}$



## SEWAGE PUMP - BLUE

Model: **WQ15-45-4**

POWER		Q (m <sup>3</sup> /h)	0	6	12	18	24	30	36
KW	HP	Q (l/min)	0	100	200	300	400	50	600
2.2	3	H	20	18.5	17.5	16.5			

Model: **WQ15-55-5.5**

POWER		Q (m <sup>3</sup> /h)	0	6	12	18	24	30	36
KW	HP	Q (l/min)	0	100	200	300	400	50	600
4	5.5	H	35	33	31.5	30			

Model: **WQ30-26-4**

POWER		Q (m <sup>3</sup> /h)	0	6	12	18	24	30	36
KW	HP	Q (l/min)	0	100	200	300	400	50	600
5.5	7.5	H	38	36	35.5	35	33.5	31.8	29



## SEWAGE PUMP - BLUE

### Motor - Specification

Two-pole induction motor	n=2850 r.p.m
Insulation Class	B
Protection	IP68
Continuous service	S1
Shield	Thermal protector



### Component Construction

Pump body	Cast Iron
Suction filter	Cast Iron
Impeller	Cast Iron
Motor shaft	AISI304 SS
Mechanical seal	Alloy / Ceramic-Graphite
Cable	8m power cable

## SEWAGE CUTTER PUMP

**VERA**Model: **CUT-1100**Model: **CUT-1500**

## SEWAGE CUTTER PUMP

### Description

Sewage cutter pump is design to handle large concentration of solids and/or tougher solids that conventional sewage pumps cannot handle. It provides clog-free operation by macerating those solids that might clog other types of submersible pumps.

### Function and Feature

Submersible pump with cutter is an ideal machine for draining sewage. A high-speed rotating cutter is assembled at the inlet hole of the pump, make it easy to cut off long-fiber and firm sundries contained in the sewage, so as to avoid the impeller is blocked by the entanglement.

The protector in the motor can automatically cut off the power when it overheated or overloaded, thus guarantee the security and reliability of pump's running even in the atrocious environment.

### Application

- 🔍 Scum pumping at waste water treatment plant
- 🔍 Municipal projects
- 🔍 Industrial packaged pump station
- 🔍 Home and domestic application (Special for kitchen)
- 🔍 Pumping agricultural manure (dairy, hog and poultry)

### Specifications

Maximum immersion depth	5 m
Water temperature	Upto 40°C
Power supply	Single phase –220V ±10% / 50Hz
pH scope	4~ 10
Maximum density of Tran's medium	1.2x10 <sup>3</sup> kg/m <sup>3</sup>
Viscosity of trans medium	7x10 <sup>7</sup> – 23x10 <sup>6</sup> m <sup>2</sup> /s




# SEWAGE CUTTER PUMP

## Hydraulic Performance Chart & Curve


Model: **CUT-1100**

Power		Outlet (inch)	Flow	USGPM	0	7	13	20	26	33	40	46	53	59	66	73
KW	HP			M3/H	0	1.5	3	4.5	6	7.5	9	10.5	12	13.5	15	16.5
				LPM	0	25	50	75	100	125	150	175	200	225	250	275
1.1	1.5	2	Head - M	10	9.9	9.4	9	8.5	8	7.4	6.9	6	5.2	4	2.5	

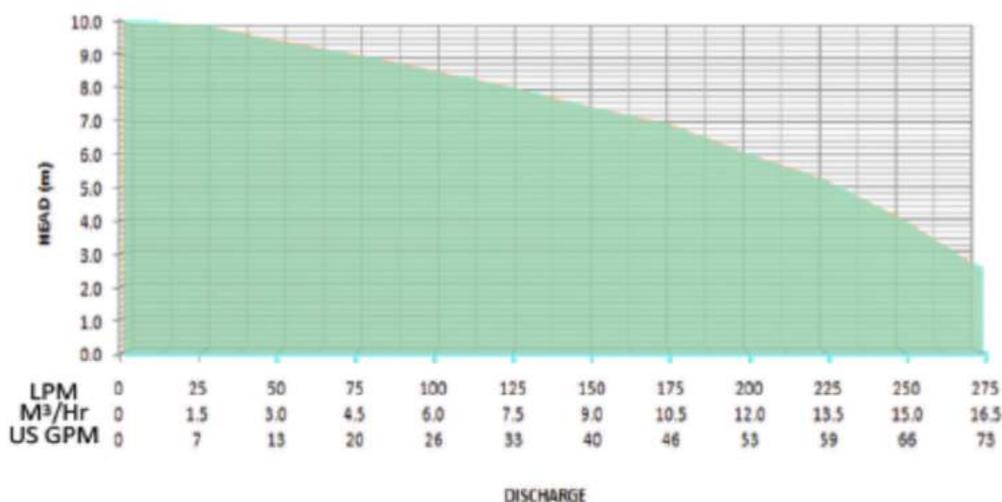

Model: **CUT-1500**

Power		Outlet (inch)	Flow	USGPM	0	13	26	40	53	66	79	92	106
KW	HP			M3/H	0	3	6	9	12	15	18	21	24
				LPM	0	50	100	150	200	250	300	350	400
1.5	2	2.5	Head - M	10	9.2	8.6	8	7.2	6	4.8	3.8	2.3	

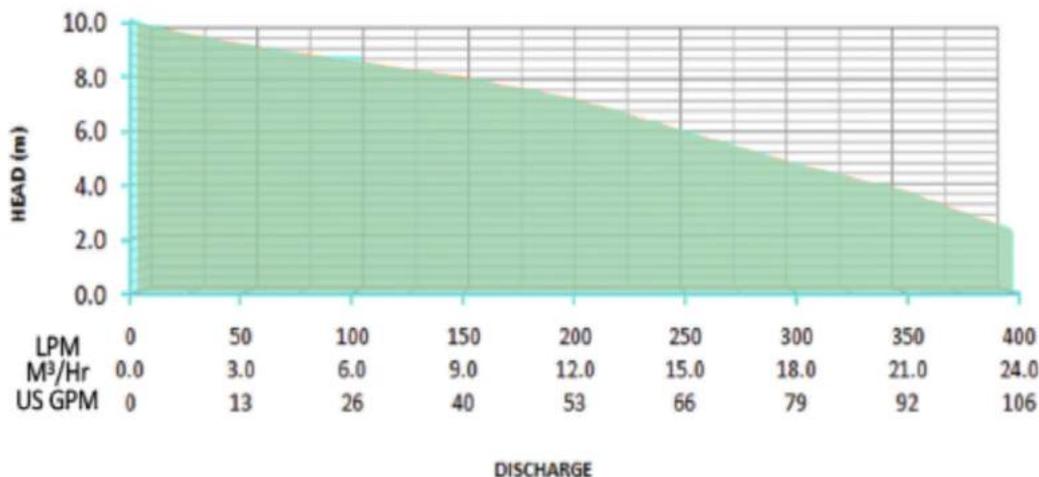

# CLEAN WATER PUMP

# VERA



## CLEAN WATER PUMP

### Description

This model of pump is characterized with high heads, compact size, light weight and convenient use and vastly used in high position water delivery, flush and places as construction sites. The float switch can automatically control on and off with the change of the water level. The protector in the motor can automatically cut off the power when it is overheated

### Application

- ⦿ House hold water supply
- ⦿ Garden watering
- ⦿ Pressure boosting system
- ⦿ Agriculture
- ⦿ Irrigation

### Specification

<b>Power Range</b>	Single Phase 220V±10%, 50Hz
<b>Water Temperature</b>	up to 45°C
<b>Power</b>	0.75 to 2.2Kw
<b>Insulation Class</b>	F
<b>Protection Class</b>	IP 68
<b>Capacity</b>	up to 15 cu.m/h
<b>Head</b>	up to 72m
<b>Max. Immersion Depth</b>	5m
<b>PH</b>	6.5 to 8.5
<b>Grain Diameter</b>	Not bigger than 0.2 mm



# CLEAN WATER PUMP

Model: **WQD1100-B**

Power		Voltage	Outlet (inch)	Max. Flow (IPM)	Max. Head (m)	Q H Meters	USGPM	0	4	9	13	18	22	26	31	35	40	44	
KW	HP						M3/H	0	1	2	3	4	5	6	7	8	9	10	
								LPM	0	17	33	50	67	83	100	117	133	150	167
1.1	1.5	220V	2	250	30	H Meters		30	29	28	27	25.5	23.5	20.5	17	14	10	6	


Model: **WQD1500-B**

Power		Voltage	Outlet (inch)	Max. Flow (IPM)	Max. Head (m)	Q H Meters	USGPM	0	4	9	13	18	22	26	31	35	40	44	
KW	HP						M3/H	0	1	2	3	4	5	6	7	8	9	10	
								LPM	0	17	33	50	67	83	100	117	133	150	167
1.5	2	220V	2	250	42	H Meters		42	40	38	36	34	31	27.5	22	16	9	4	

Model: **WQD2200-B**

Power		Voltage	Outlet (inch)	Max. Flow (IPM)	Max. Head (m)	Q H Meters	USGPM	0	4	9	13	18	22	26	31	35	40	44	
KW	HP						M3/H	0	1	2	3	4	5	6	7	8	9	10	
								LPM	0	17	33	50	67	83	100	117	133	150	167
2.2	3	220V	2	175	72	H Meters		72	67	61	54	45	32.5	20.5	8				

## Hydraulic Performance Curve

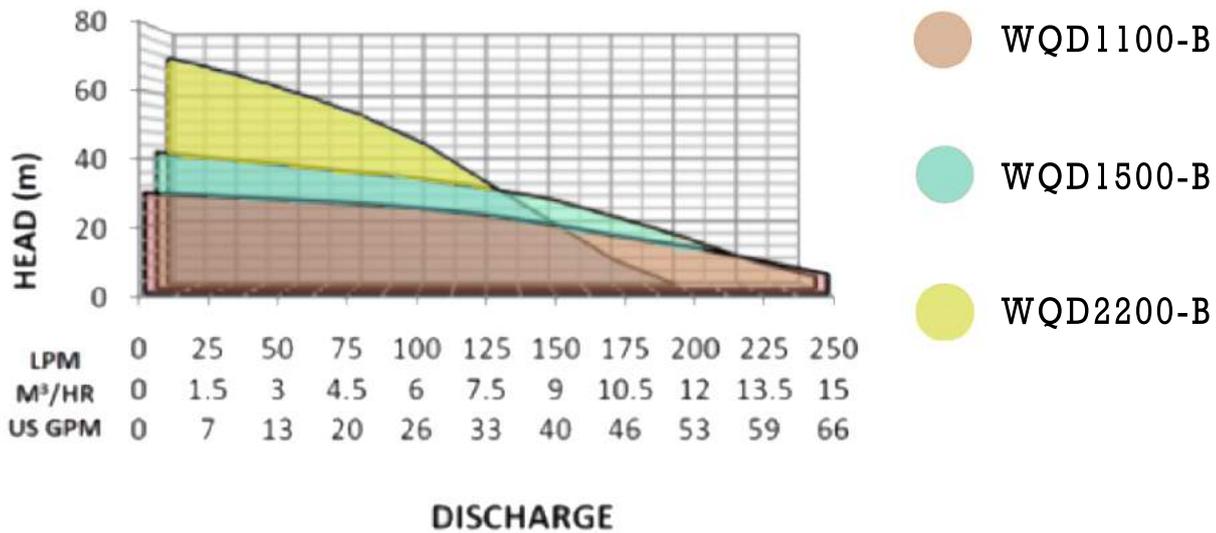

**AUTOMATIC CLEAN WATER PUMP - BLACK**

**AUTOMATIC CLEAN WATER PUMP - BLACK****Description**

The submersible pump with plastic housing is configured to use with clean water that does not contain any abrasive particles.

**Key Features**

- ⦿ Fast and Effective
- ⦿ Reliability and Easy to Use
- ⦿ Long-Lasting
- ⦿ Protection from Overload

**Applications**

- ⦿ Domestic
- ⦿ Gardening
- ⦿ Irrigation
- ⦿ Emptying Tanks

**Operating Conditions**

- ⦿ 8 m Maximum Immersion Depth
- ⦿ Liquid Temperature upto 35°C
- ⦿ Maximum Ambient Temperature 40°C



## AUTOMATIC CLEAN WATER PUMP - BLACK

Model: **QDP90-4SE**

POWER(IN)	Q (m <sup>3</sup> /h)	0	0.6	1.2	1.8	2.4	3	3.6	4.2	4.8	5.4
KW	Q (l/min)	0	10	20	30	40	50	60	70	80	90
1	H	42	40.5	38.5	36.5	34	30.5	26	20	14	8



## AUTOMATIC CLEAN WATER PUMP - BLACK

### Motor - Specification

Two-pole induction motor	n=2850 r.p.m
Insulation Class	B
Protection	IP68
Continuous service	S1
Shield	Thermal protector



### Component Construction

Pump body	Technopolymer & AISI304 SS
Suction filter	Technopolymer
Impeller	Noryl
Motor shaft	AISI304 SS
Mechanical seal	Ceramic/Graphite
Cable	12m power cable with plug

**CLEAN WATER PUMP - STAINLESS STEEL**

**CLEAN WATER PUMP - STAINLESS STEEL****Description**

The submersible pump with stainless steel is configured to use with clean water that does not contain any abrasive particles.

**Key Features**

- ⦿ Fast and Effective
- ⦿ Reliability and Easy to Use
- ⦿ Long-Lasting
- ⦿ Protection from Overload

**Applications**

- ⦿ Domestic
- ⦿ Gardening
- ⦿ Irrigation
- ⦿ Emptying Tanks

**Operating Conditions**

- ⦿ 3 m Maximum Immersion Depth
- ⦿ Liquid Temperature upto 35°C
- ⦿ Maximum Ambient Temperature 40°C



## CLEAN WATER PUMP - STAINLESS STEEL

Model: **QDS-370D**


POWER		Q (m <sup>3</sup> /h)	0	0.9	1.8	2.7	3.6	4.5	5.4	6.3	7.2	8.1
KW	HP	Q (l/min)	0	15	30	45	60	75	90	105	120	135
0.37	0.5	H	7	6.5	6	5.5	5	4.5	3.8	2.8	1.5	

Model: **QDS-550D**

POWER		Q (m <sup>3</sup> /h)	0	0.9	1.8	2.7	3.6	4.5	5.4	6.3	7.2	8.1
KW	HP	Q (l/min)	0	15	30	45	60	75	90	105	120	135
0.55	0.75	H	9	8	7.5	7	6.5	6	5.5	5	4	3

Model: **QDS-750D**

POWER		Q (m <sup>3</sup> /h)	0	0.9	1.8	2.7	3.6	4.5	5.4	6.3	7.2	8.1
KW	HP	Q (l/min)	0	15	30	45	60	75	90	105	120	135
0.75	1	H	10	9	8.5	8	7.5	7	6.5	5.6	4.8	4

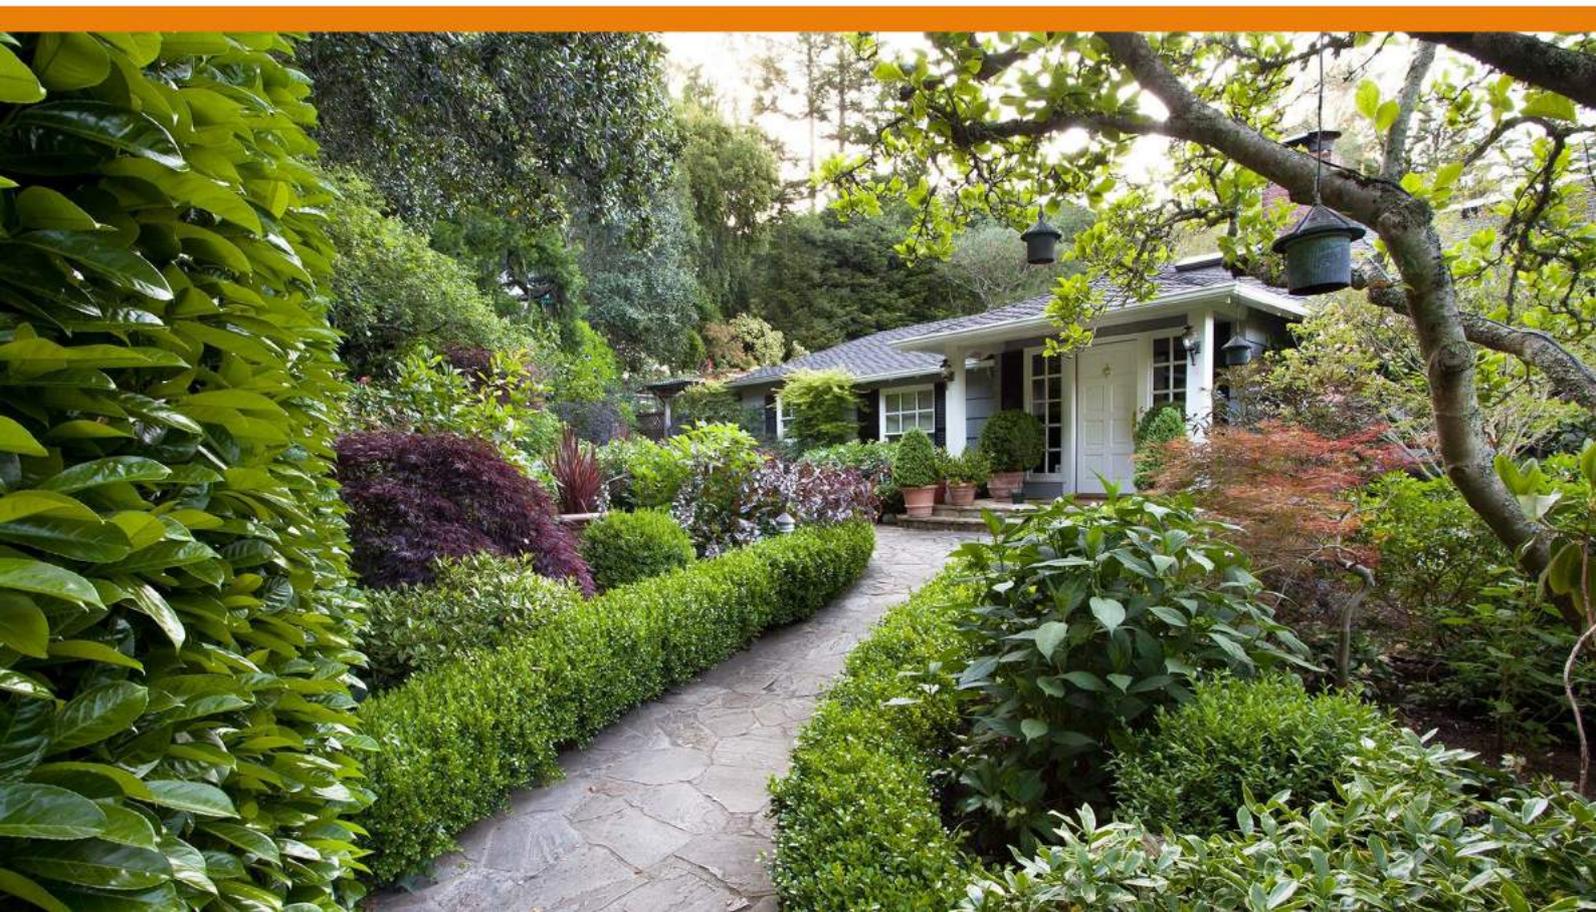

## CLEAN WATER PUMP - STAINLESS STEEL

### Motor - Specification

Two-pole induction motor	n=2850 r.p.m
Insulation Class	B
Protection	IP68
Continuous service	S1
Shield	Thermal protector



### Component Construction

Pump body	AISI304 SS
Suction filter	Technopolymer
Impeller	Noryl
Motor shaft	AISI304 SS
Mechanical seal	Ceramic/Graphite
Cable	6m power cable with plug

**SUBMERSIBLE PUMP FOR CLEAN WATER**



**SUBMERSIBLE PUMP FOR CLEAN WATER****Description**


The submersible pump with plastic housing is configured to use with clean water that does not contain any abrasive particles.

**Key Features**

- ⦿ Fast and Effective
- ⦿ Float Switch Control
- ⦿ Long-Lasting
- ⦿ Protection from Overload

**Applications**

- ⦿ Domestic
- ⦿ Gardening
- ⦿ Irrigation
- ⦿ Emptying Tanks

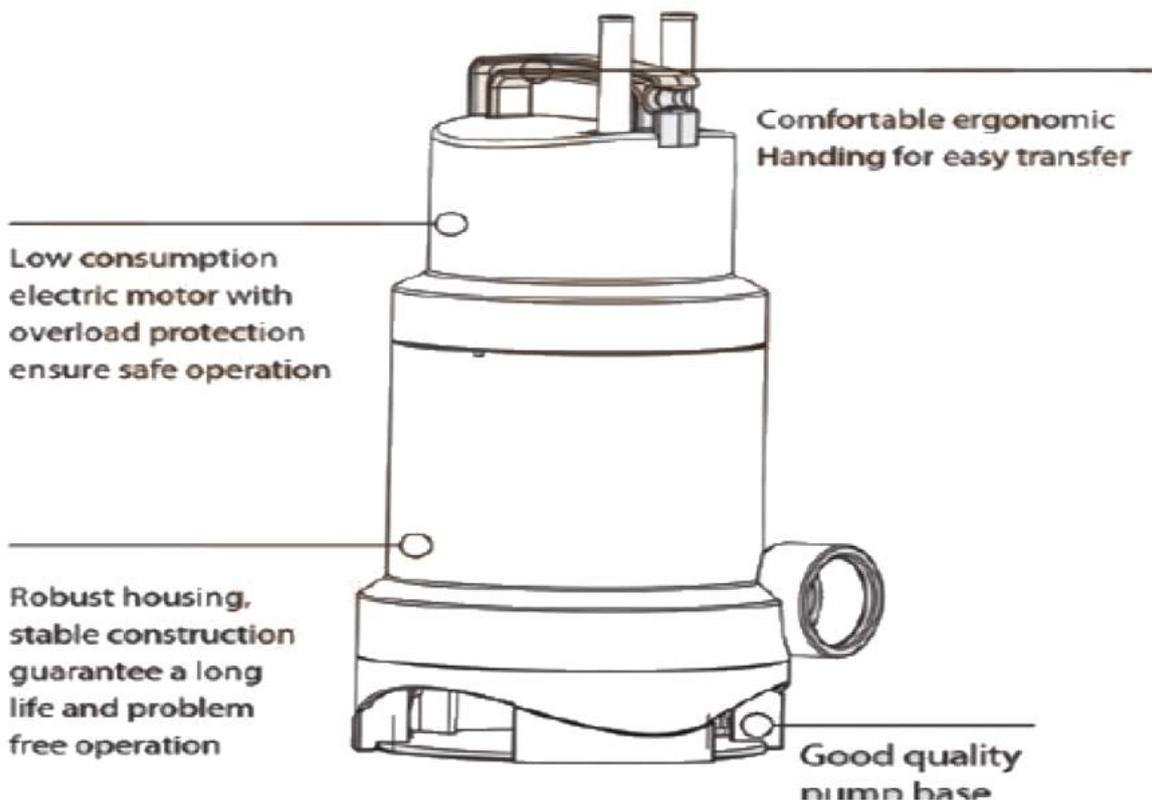

## SUBMERSIBLE PUMP FOR CLEAN WATER

### Model: QDP-400B

POWER		Q (m <sup>3</sup> /h)	0	0.9	1.8	2.7	3.6	4.5	5.4	6.3	7.2	8.1
KW	HP	Q (l/min)	0	15	30	45	60	75	90	105	120	135
0.55	0.75	H	7	6.5	6	5.5	5	4.5	3.8	2.8	1.5	

### Model: QDP-550B

POWER		Q (m <sup>3</sup> /h)	0	0.9	1.8	2.7	3.6	4.5	5.4	6.3	7.2	8.1
KW	HP	Q (l/min)	0	15	30	45	60	75	90	105	120	135
0.75	1	H	9	8	7.5	7	6.5	6	5.5	5	4	3

### Model: QDP-750B

POWER		Q (m <sup>3</sup> /h)	0	0.9	1.8	2.7	3.6	4.5	5.4	6.3	7.2	8.1
KW	HP	Q (l/min)	0	15	30	45	60	75	90	105	120	135
1			10	9	8.5	8	7.5	7	6.5	5.6	4.8	4



Stainless Steel V4 Borewell Submersible  
Pumpset (oil filled) 100 mm



**SUBMERSIBLE PUMPSET - OIL FILLED****Description**

VERA submersible pumps & motors are well known for its quality, Reliability & excellence for all type of service purpose. VERA submersible pumps & motors are manufactured under supervision of highly qualified technical team with a stage wise rigid inspection procedure under TQM concepts. Application of Bore well submersible pumps are in Hospitals, Water circulation systems, Water supply systems of Government, Irrigation, Farms & Drip & sprinkler irrigation, Gardening, Nurseries, Domestic water supply, Multi-storey Building, Industries & Hotels.

VERA oil filled pumps sets are highly efficient, Low power consumption, complete absence of suction trouble. Maintenance free operation due to water lubricating bearings, vibration free & noiseless operation and world class design gives higher discharge & high efficiency. Easily repairable & dismantable.

VERA oil filled submersible motors are easily rewind able & repairable. Motor filled with food grade cooling oil. Oil filled motor consist of ball bearing to minimize the frictional losses & to increase the efficiency. Oil used as a coolant and work as lubricant in motor so life of motor is increases due to less wear & tear. The basic function of coolant is to lubricant bearing of rotor, removing heat generated in motor and oil is working as a coolant for smooth operation of pump.

VERA BORE WELL SUBMERSIBLE PUMP confirm to IS : 8034.  
Mounting dimension of 4" pumps sets are as per NEMA standard

**Application**

- 🕒 Water supply fram bore well
- 🕒 AC and solar energy compatible
- 🕒 Municipal & Irrigation purposeL
- 🕒 Water 8upply in commercial establiehmente
- 🕒 Small farms, gardening & nursarjee.

## SUBMERSIBLE PUMPSET - OIL FILLED

### Specification

Power Range	0.5 HP - 5.0 HP in 1 Phase
	0.5 HP - 10 HP in 3 Phase
Version	220-240V 50 Hz, A.G.-1 Phase,
	350&40V – 3 Phase
Speed	2880 rpm.
Discharge Range	23 - 250 in 1 Phase
	23 – 250 In 3 Phase
Head Range	42 – 200 mtr In 1 Phase
	42 – 350 mtr in 3 Phese
Outlet size	25, 32, 40 & 50 mm
Degree of Protection	IP 68
Maximum Outer diameter	98 mm
Duty	S1 (Continuous)
Method of starting	Capacitor start and run (CSR) in oil filled In 1 Phase /DOL in 3 Phase
Mounting Standard	As per NEMA


### Material of Construction - Pump

NRV Housing	Stainless Steel
Check Valve	Stainless Steel
Check Valve Sheet	NBR
Impeller	Stainless Steel
Bowl	Stainless Steel
Pump Sheft	SS 431
Suction inter Connector	Stainless Steel
Coupling	SS 410

### Material of Construction - Motor

Upper, Lower Housing & Motor Base	Cast Iron / Stainless Steel
Stator Shell	Cast Iron
Shaft	Stainless Steel
Bearing	Laaded Branze in watar filled Anti frictional deep groove ball bearing in oil filled
Thrust Set	Carbon Vis SS in water filled

**Stainless Steel V4 Borewell Submersible  
Pumpset (water filled) 100 mm**

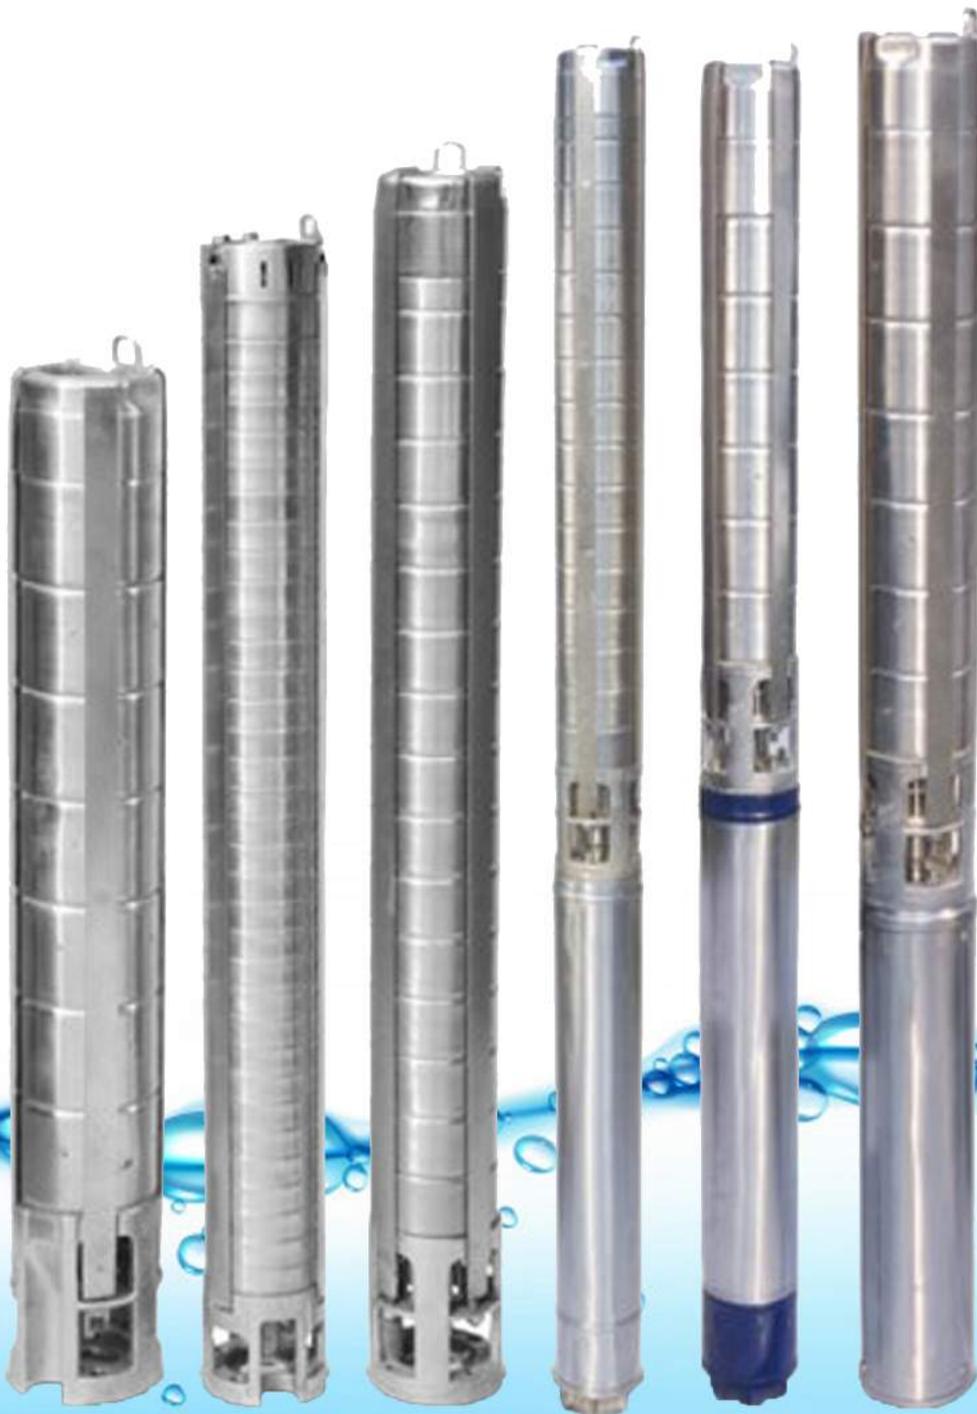

**SUBMERSIBLE PUMPSET - WATER FILLED****Description**

VERA submersible pumps & motors are well known for its quality, Reliability & excellence for all type of service purpose. VERA submersible pumps & motors are manufactured under supervision of highly qualified technical team with a stage wise rigid inspection procedure under TQM concepts. Application of Bore well submersible pumps are in Hospitals, Water circulation systems, Water supply systems of Government, Irrigation, Farms & Drip & sprinkler irrigation, Gardening, Nurseries, Domestic water supply, Multi-storey Building, Industries & Hotels.

VERA water filled pumps are available in model 100mm (V-4) normal bore with a consumption of various materials. With hardwearing bushes makes pumps highly efficient which is useful to corrosion resistance. Various models have a inbuilt check valve facilities which prevent back flow of liquid.

VERA water filled pumps sets are highly efficient, Low power consumption, complete absence of suction trouble. Maintenance free operation due to water lubricating bearings, vibration free & noiseless operation and world class design gives higher discharge & high efficiency. Easily repairable & dismountable.

VERA BORE WELL SUBMERSIBLE PUMP confirm to IS : 8034.  
Mounting dimension of 4" pumps sets are as per NEMA standard

**Application**

- 🕒 Water supply fram bore well
- 🕒 AC and solar energy compatible
- 🕒 Municipal & Irrigation purposeL
- 🕒 Water 8upply in commercial establiehmente
- 🕒 Small farms, gardening & nursariee.

## SUBMERSIBLE PUMPSET - WATER FILLED

### Specification

Power Range	0.5 HP - 5.0 HP in 1 Phase
	0.5 HP - 10 HP in 3 Phase
Version	220-240V 50 Hz, A.G.-1 Phase,
	350&40V – 3 Phase
Speed	2880 rpm.
Discharge Range	23 - 250 in 1 Phase
	23 – 250 In 3 Phase
Head Range	42 – 200 mtr In 1 Phase
	42 – 350 mtr in 3 Phese
Outlet size	25, 32, 40 & 50 mm
Degree of Protection	IP 68
Maximum Outer diameter	98 mm
Duty	S1 (Continuous)
Method of starting	Capacitor start and Capacitor run (CSCR) in water filled Capacitor start and run (CSR) in oil filled In 1 Phase /DOL in 3 Phase
Mounting Standard	As per NEMA

### Material of Construction - Motor

NRV Housing	Stainless Steel
Check Valve	Stainless Steel
Check Valve Sheet	NBR
Impeller	Stainless Steel
Bowl	Stainless Steel
Pump Sheft	SS 431
Suction inter Connector	Stainless Steel
Coupling	SS 410

### Material of Construction - Pump

Upper, Lower Housing & Motor Base	Cast Iron / Stainless Steel
Stator Shell	Cast Iron
Shaft	Stainless Steel
Bearing	Laaded Branze in watar filled Anti frictional deep groove ball bearing in oil filled
Thrust Set	Carbon Vis SS in water filled

SUBMERSIBLE MOTOR



4" OSF-100



6" OSF-150



4" OSF-100

## SUBMERSIBLE MOTOR

### Description

VERA Induction Motors for various industrial application like Machine tools, Textiles, Air Conditioning, Dairy Equipments, Crane & Hoist, Pollution control, Aquaculture & agriculture, Fertilizers, Mines & Chemicals Industry. The Range of products are standard motors, energy efficient motors, dual speed motors, cooling tower motors and other special motors designed as per customers specifications. The qualities of motors are excellent as it is manufactured under the supervision of a team of highly qualified, experienced & dedicated people of the organization.

All motor shafts are of 40 C8 /EN-8 material. Motor shaft of AISI 304, 316, 431,410 & other material can be supplied on request. Shaft are having threaded centre hole for locking of pulley / gear from driving end. Motors are supplied with keys duly fitted on the shaft.

All standard motors are capable of service factor 1.1 at rated voltage & frequency / or continuous duty. Rotors are of squirrel cage, aluminum die cast & are dynamically balanced with a half key to keep the vibration levels low. Motors with very low vibration level requirement for machine tool application can be given on request. Core material is low loss high grade silicon steel.

All motors can withstand momentary overload of 1.6 times of rated torque, for 15 seconds without stalling.

All standard motors are having deep groove radial ball bearings '(Single row)'. Deep groove ball bearings are capable of taking axial loads in both the direction in addition to the radial loads at high speed.

Oil seals are provided to ensure IP - 55 protections. The rubbing action on sealing surface prevents penetration of solid contaminants /moisture into the motor. The rubbing surfaces are with appropriate surface finish. Hence rise in temperature is minimum.

Noise levels of the motors are maintained as per specification in IS : 12065.

Motors are tested for vibration level of normal class as per IS : 12075. Precision levels of vibration can also be given on request.

Motors can withstand for starting up time 5 to 7 seconds for two starts from cold condition. For any other condition customer shall specify GD2 speed, period of acceleration. Duty cycle, speed torque curve of driven equipment & method of starting.

## SUBMERSIBLE MOTOR

### Specification

Technical Data	4"OSL-100	4"OSF-100	6"OSF-150
Power Range	0.5-15 HP in 1 & 3 Phase	2-5 Hp In 1 Phase 2-7.5 HP in 3 Phase	5.5-50 Hp in 3 Phase
Version	380-415v, 3 Phase 50 Hz 220-240, 1 Phase 50 Hz	380-415V, 3 Phase, 50 Hz 220-240V, 1 Phase, 50 Hz 380/460v, 3 Phase, 60 Hz	380-415V, 3 Phase, 50 Hz 380-460V, 3 Phase, 60 Hz
Speed (rpm)	2850-2880 at 50 Hz	2850-2880 at 50 Hz 3450 at 60 Hz	2850-2880 at 50 Hz 3450 at Hz

### Material of Construction - Motor

Upper, Lower Housing & Motor Base	Cast Iron / Stainless Steel
Stator Shell	Stainless Steel
Shaft	Stainless Steel
Beaing	Leaded Bronze in water filled Anti frictional Deep groove ball bearing in oil filled
Thrust Set	Carbon V/s SS in water filled

## CENTRIFUGAL MONOBLOCK PUMP

# VERA



Model: **CPM - 158**

### Description

Centrifugal Monoblock Pump's volute chamber and impellers are carefully designed to give the best possible hydraulic efficiency and suction lift characteristics

## Specifications

<b>Power Range</b>	0.37KW - 1.5KW
<b>Speed</b>	2900 RPM
<b>Versions</b>	230V, 50Hz A.C. Supply Permanent Split Capacitor (PSC) Inbuild Thermal Overload Protector
<b>Type of Duty</b>	S1 (Continuous)
<b>Degree of Protection</b>	IP 54
<b>Insulation Class</b>	F
<b>Suction Lift Upto</b>	7 m
<b>Maximum Liquid Temperature</b>	50°C
<b>Maximum Ambient Temperature</b>	40°C
<b>Discharge Range</b>	1 - 31 cu.m/h
<b>Head range</b>	6 - 33 m
<b>Normal Suction Size</b>	1", 1-1/4", 1 - 1/2", 2", 2 - 1/2"
<b>Normal Delivery Size</b>	1", 1-1/4", 1 - 1/2", 2"
<b>PCS./CRTN</b>	2 PCS

## Features

- High operated efficiency resulting in lower power consumption
- Good suction lift characteristics
- Dynamically balanced rotating parts including rotor and impeller
- Balanced and rigid constructions



Model: **ARM - 100**

## Description

Peripheral pumps are single stage centrifugal, non-self priming volute pumps carefully designed to give best possible hydraulic efficiency and suction lift characteristics

## Specifications

<b>Power Range</b>	0.37KW & 0.75KW
<b>Speed</b>	2900 RPM
<b>Versions</b>	A.C. Single Phase 220V-240V 50Hz Permanent Split Capacitor (PSC) Incorporated with Thermal Overload Protector
<b>Type of Duty</b>	Continuous
<b>Degree of Protection</b>	IP 54
<b>Insulation Class</b>	B
<b>Flow Rate upto</b>	0.87LPS / 3.13 cu. m/h
<b>Head Range upto</b>	243 ft / 74 m
<b>Suction Lift upto</b>	25 ft / 8 m
<b>Nominal Suction and Delivery Size</b>	1" x 1" (BSP)
<b>Maximum Liquid Temperature</b>	50° C
<b>Maximum Ambient Temperature</b>	40° C
<b>Maximum Operating Pressure</b>	6.2 BAR
<b>PCS./CRTN</b>	2 PCS

## Features

- 🔍 Sturdy and compact
- 🔍 Quite and maintenance free
- 🔍 Excellent hydraulic performance
- 🔍 Optimal design
- 🔍 Good suction capacity
- 🔍 Brass insert is provided in the pump casing
- 🔍 Incorporated with thermal overload protector
- 🔍 Dynamically balanced rotating parts

## AUTOMATIC PRESSURE KIT

**VERA**Model: **DPS - 1**Model: **DPS - 2**

## AUTOMATIC PRESSURE KIT



## Specifications

Model: **DPS - 1**

Minimum Pressure	10 Bar
Containing Thread	GI - ISO 228
Operating Temperature	0-68°
Normal Voltage	1 - 220/240V
Frequency	50/60 Hz
IP Protection Degree	IP 54
Max F/ON	10.2 kg/ sq. cm 145PSI(MAX)
PCS./CRTN	98 mm



Model: **DPS - 2**

Minimum Pressure	10 Bar
Containing Thread	GI - ISO 228
Operating Temperature	0-68°
Normal Voltage	1 - 220/240V
Frequency	50/60 Hz
IP Protection Degree	IP 54
Max F/ON	10.2 kg/ sq. cm 145PSI(MAX)
PCS./CRTN	98 mm



## FLOAT SWITCH



Model: **V4000 Series**

### Electrical Features

Microswitch	250V~
Rated Current	16(8)A
Max. Operational Temperature	50°C
Storage Temperature	Minus 10°C to Plus 60°C
Protection Grade	IP68

**Colour**

● Blue

**Size**

↔ 2m, 3m, 5m, 10m

## PUMPS ACCESSORIES

### G.I Pipes & Fittings



**Size: 1½" - 4"**

Authorized Distributor of Jazeera Oman, Tm

### Submersible Cables



**PVC insulated double coated**

### Column Pipes



**Size: 1½" - 3"**

(Standard, Heavy duty)

### Electric Starters



**LPT Switchgear**

### Cable Joint



### PVC Pipes & Fittings



**Casing Pipe, PVC Pipes Class 10 & 16**





**VERA**

**PUMPS, MOTORS AND ACCESSORIES**

*Product of*  
**JUNAID**   
GROUP OF COMPANIES

 **800 JUNAID**  
**586243**

**+971 54 994 6952**  
**marketing@junaid.ae**  
**www.junaidworld.com**

**Office no. 302, Liberty Building, Al Garhoud, Dubai - United Arab Emirates**  
**PO Box 34862, Tel +971 4 2367723, Fax +971 42367250**